

Rechargeable Thin Film Battery 50μAh, 3.8V

Features

- All Solid State
- SMT Package and Process
- Lead-Free Reflow Tolerant
- Thousands of Recharge Cycles
- Low Self-Discharge
- Eco-Friendly, RoHS Compliant

Electrical Properties

Output voltage:	3.8V
Capacity (typical):	50μAh
Charging source:	4.00V to 4.15V
Recharge time to 80%	50 minutes
Charge/Discharge cycles:	>5000 to 10% Discharge

Physical Properties

Package size:	8 mm x 8 mm
Operating temperature:	-20 °C to 70 °C
Storage temperature:	-40 °C to 125 °C

Applications

- **Standby supply** for non-volatile SRAM, real-time clocks, controllers, supply supervisors, and other system-critical components.
- **Wireless sensors and RFID tags** and other powered, low duty cycle applications.
- **Localized power source** to keep microcontrollers and other devices alert in standby mode.
- **Power bridging** to provide backup power to system during exchange of main batteries.
- **Energy Harvesting** by coupling the EnerChip with energy transducers such as solar panels.




8 mm x 8 mm
QFN SMT Package

The EnerChip™ CBC050 is a surface-mount, solid state, rechargeable battery rated for 50μAh at 3.8V. It is ideal as a localized, on-board power source for SRAMs, real-time clocks and microcontrollers which require standby power to retain time or data. It is also suitable for RFID tags, smart sensors, and remote applications which require a miniature, low-cost, and rugged power source. For many applications, the CBC050 is a superior alternative to coin cell batteries and supercapacitors.

Because of their solid state design, EnerChip™ batteries are able to withstand solder reflow temperatures and can be processed in high-volume manufacturing lines similar to conventional semiconductor devices. There are no harmful gases, liquids or special handling procedures, in contrast to traditional rechargeable batteries.

The EnerChip recharge is fast and simple, with a direct connection to a 4.1V voltage source and no current limiting components. Recharge time is 50 minutes to 80% capacity. Robust design offers thousands of charge/discharge cycles. The CBC050 is packaged in an 8 mm x 8 mm quad flat package. It is available in reels for use with automatic insertion equipment.

Pin Number(s)	Description
1	V+
4	V-
2,3	NIC
5-16	NIC
Note: NIC = No Internal Connection	



CBC050 Schematic - Top View

EnerChip™ CBC050 Thin Film Battery

Operating Characteristics

Parameter	Condition	Min	Typical	Max	Units	
Discharge Cutoff Voltage	25 °C	3.0 ⁽¹⁾	-	-	V	
Charge Voltage	25 °C	4.0 ⁽²⁾	4.1	4.3	V	
Pulse Discharge Current	25 °C	300 ⁽³⁾	-	-	μA	
Cell Resistance	25 °C	-	1500	3000	Ω	
Self-Discharge (average)	non-recoverable	-	2.5	-	% per year	
	recoverable	-	8 ⁽⁴⁾	-	% per year	
Operating Temperature	-	-20	25	70	°C	
Recharge Cycles (to 80% of rated capacity; 4.1V charge voltage)	25 °C	10% depth-of-discharge	5000	-	-	cycles
		50% depth-of-discharge	1000	-	-	cycles
	40 °C	10% depth-of-discharge	2500	-	-	cycles
		50% depth-of-discharge	500	-	-	cycles
Recharge Time (to 80% of rated capacity)	4.1V constant voltage	-	50	-	minutes	
Capacity	8 μA discharge; 25 °C	-	50	-	μAh	

⁽¹⁾ Failure to cutoff the discharge voltage at 3.0V will result in battery performance degradation.


⁽²⁾ Charging at 4.0V will charge the cell to approximately 70% of its rated capacity.

⁽³⁾ Typical pulse duration = 20 milliseconds.


⁽⁴⁾ First month recoverable discharge is 5% average.

Note: All specifications contained within this document are subject to change without notice

Typical Discharge Capacity Characteristics

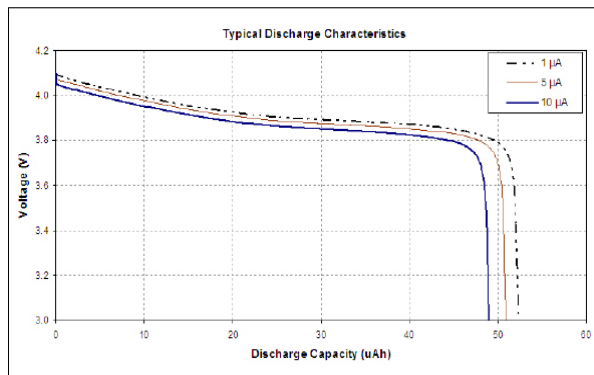

Typical Discharge Rate Performance

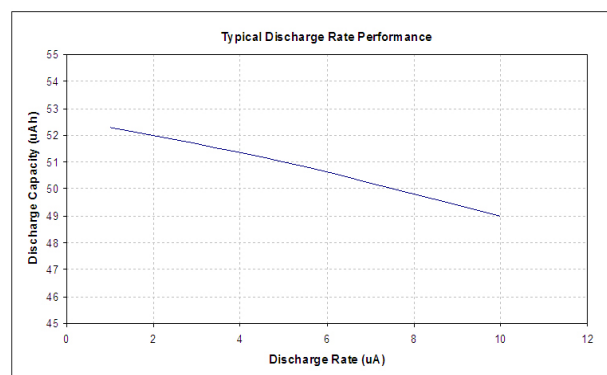


Ordering Information

EnerChip Part Number	Description	Notes
CBC050-M8C-ES	50 μAh in 16-pin M8 QFN Package	tube
CBC050-M8C-ES-TR1	50 μAh in 16-pin M8 QFN Package	tape & reel 1000 pcs
CBC050-M8C-ES-TR5	50 μAh in 16-pin M8 QFN Package	tape & reel 5000 pcs
CBC050-M8C-ES-WP	50 μAh in 16-pin M8 QFN Package	waffle pack
CBC050-BDC-WP	50 μAh Bare Die Package	waffle pack

EnerChip™ CBC050 Thin Film Battery

Package Dimensions - 16-pin QFN (package code M8)

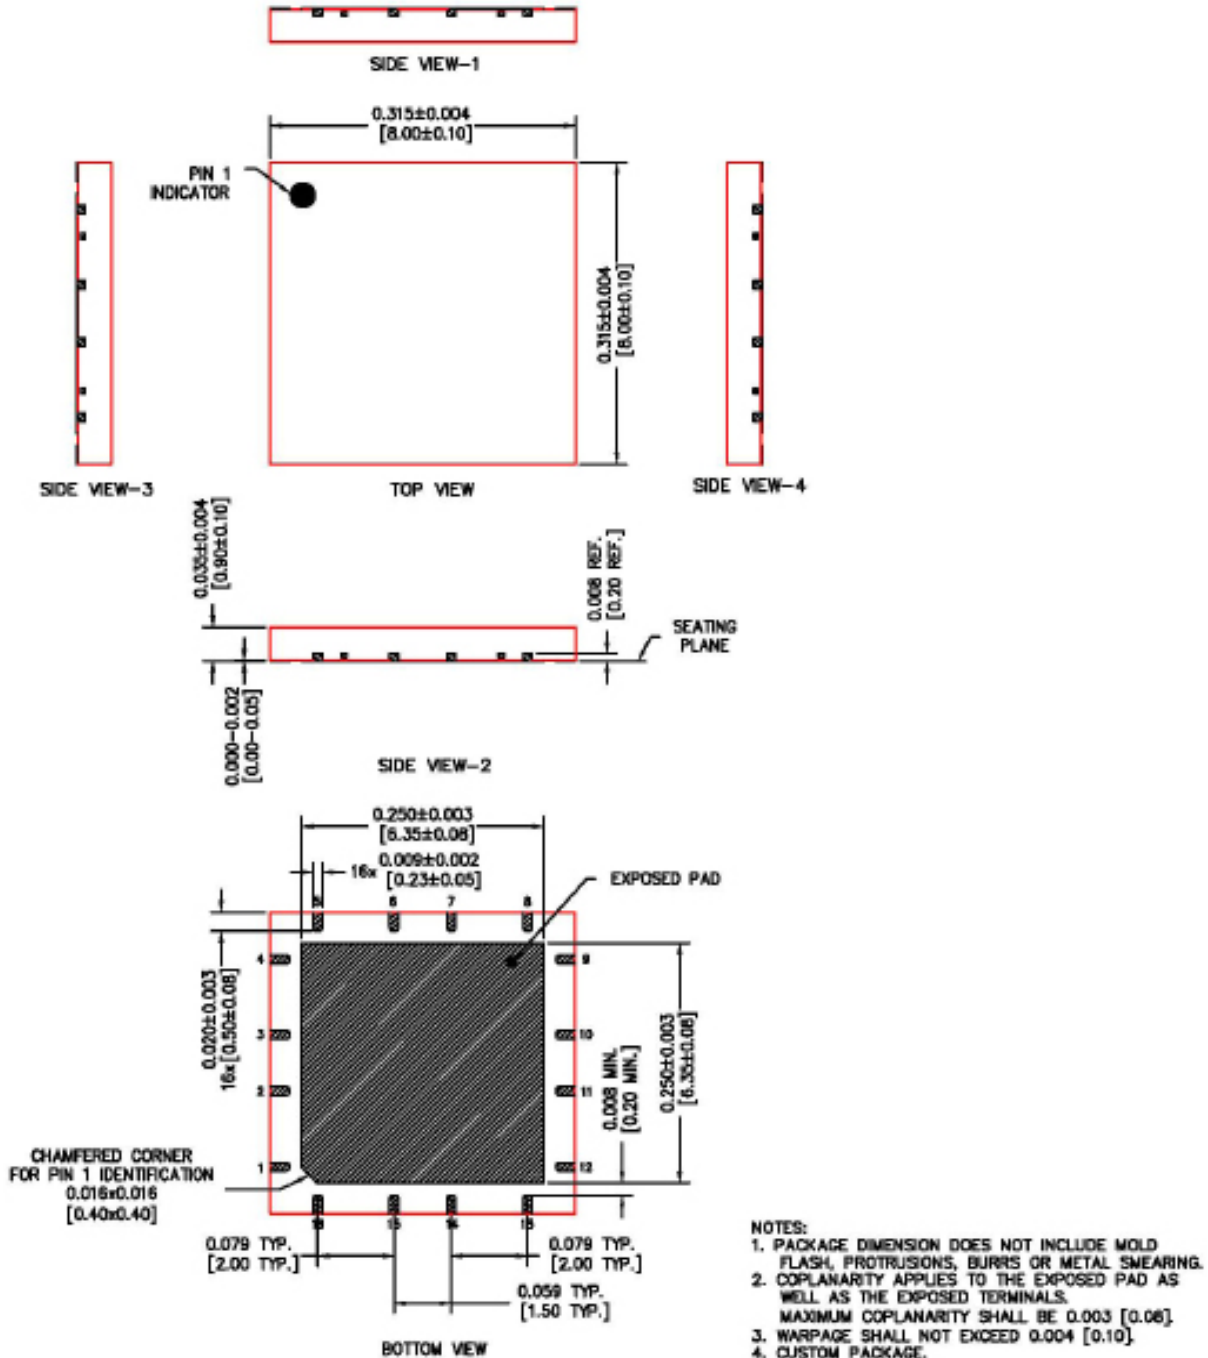

[Dimensions in inches [mm]]


EnerChip™ CBC050 Thin Film Battery

Printed Circuit Board (PCB) Layout Guidelines and Recommendations

Electrical resistance of solder flux residue on PCBs can be low enough to partially or fully discharge the backup energy cell and in some cases can be comparable to the load typically imposed on the cell when delivering power to an integrated circuit in low power mode. Therefore, solder flux must be thoroughly washed from the board following soldering. The PCB layout can make this problem worse if the cell's positive and negative terminals are routed near each other and under the package, where it is difficult to wash the flux residue away.

To avoid this situation, make sure positive and negative traces are routed outside of the package footprint to ensure that flux residue will not cause a discharge path between the positive and negative pads. Similarly, a leakage current path can exist from the package lead solder pads to the exposed die pad on the underside of the package as well as any solder pad on the PCB that would be connected to that exposed die pad during the reflow solder process. Therefore, it is strongly recommended that the PCB layout not include a solder pad in the region where the exposed die pad of the package will land. It is sufficient to place PCB solder pads only where the package leads will be. That region of the PCB where the exposed die pad will land must not have any solder pads, traces, or vias.

A recommended CBC050 PCB layout is shown in Figure 1 below. Notice that there should not be a center pad on the PCB to mate with the exposed die pad on the CBC050 package. Again, this is to reduce the possible number and severity of leakage paths between the battery terminals.

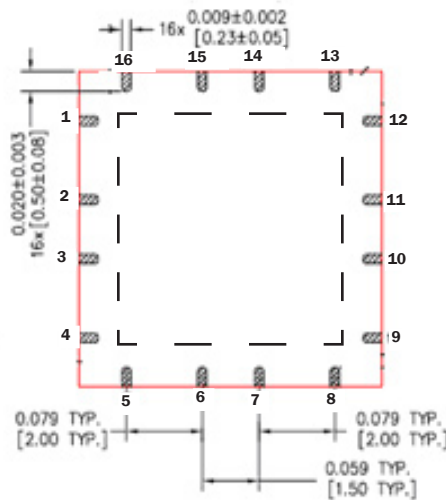

Dimensions in inches [mm]

Figure 1: Recommended PCB layout for the CBC050 package. Do not route signal traces under the EnerChip as they could become shorted to the die pad (as shown by the dotted lines) on the package underside.

Cymbet, the Cymbet Logo and EnerChip are trademarks of Cymbet Corporation. All Rights Reserved

Disclaimer of Warranties; As Is

The information provided in this data sheet is provided "As Is" and Cymbet Corporation disclaims all representations or warranties of any kind, express or implied, relating to this data sheet and the Cymbet battery product described herein, including without limitation, the implied warranties of merchantability, fitness for a particular purpose, non-infringement, title, or any warranties arising out of course of dealing, course of performance, or usage of trade. Cymbet battery products are not approved for use in life critical applications. Users shall confirm suitability of the Cymbet battery product in any products or applications in which the Cymbet battery product is adopted for use and are solely responsible for all legal, regulatory, and safety-related requirements concerning their products and applications and any use of the Cymbet battery product described herein in any such product or applications.